


NO	DATE	ZONE	REVISION	CO'T	SIGN
△					

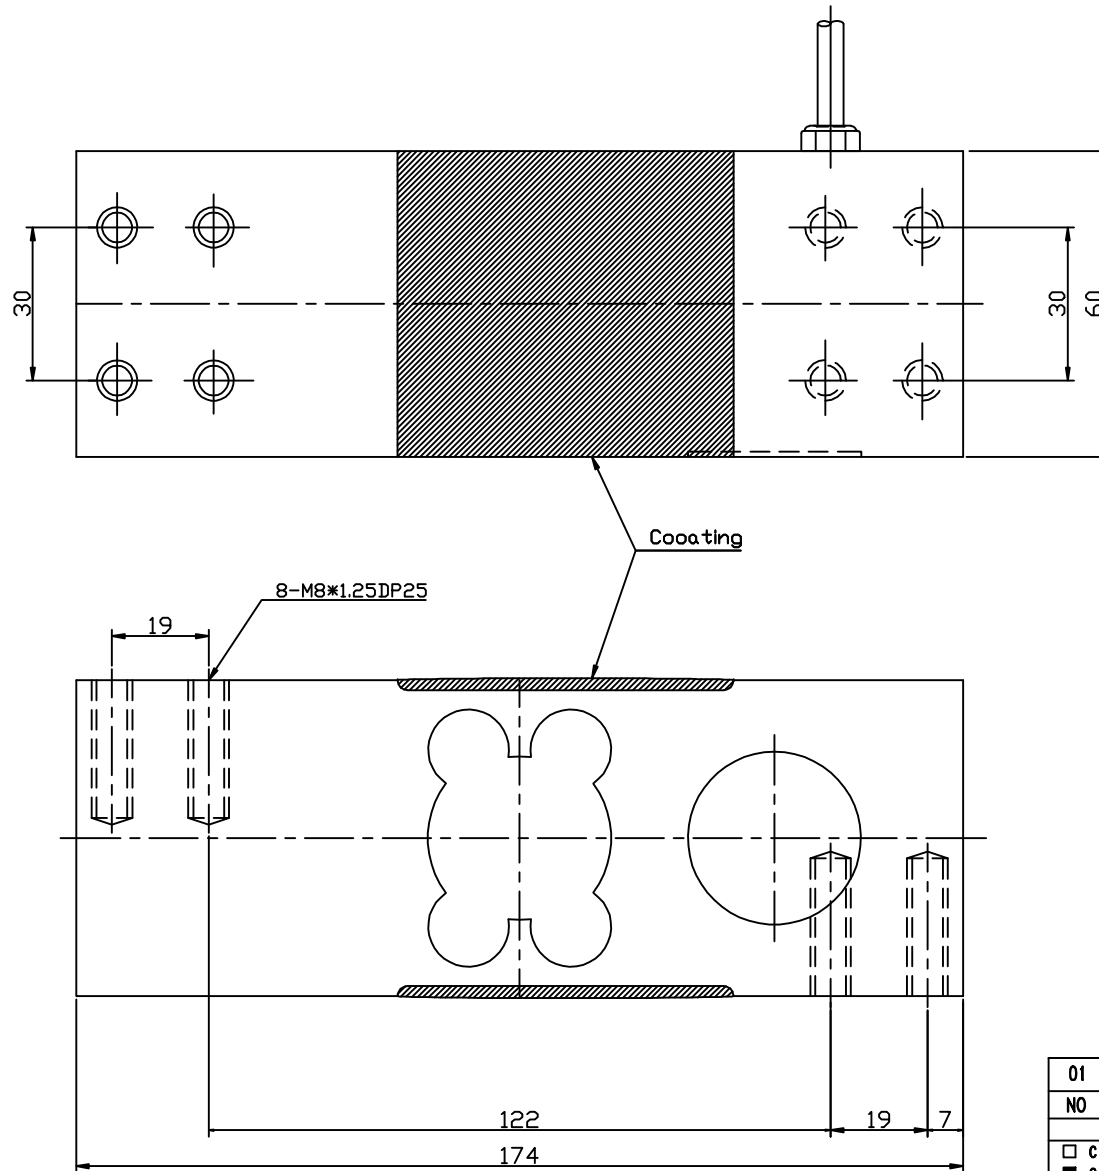

* Specifications

Rated capacity(R.C)	100kgf,250gkf
Rated output(R.□)	2mV/V±1%
Nonlinearity	0.02%R□
Hysteresis	0.02%R□
Repeatability	0.02%R□
Excitation recommended	10V
Terminal resistance	350Ω ±1%
Insulation resistance bridge	2000MΩ
Temperature range, compensated	-10 ~ 50°C
Temperature range, safe	-10 ~ 50°C
Safe overload	120%RC
Cable length	φ5±0.3mm 4Core, 2m

01						
NO	DESCRIPTION	MATERIAL	HEART TREAT	Q'TY	DIMENSIONS	REMARK
CHAMFER		SCALE 1 : 1		ANGLE 1st 3rd	DESCRIPTION LOADCELL	
☐ C 0.1 ☐ C 0.3 ☒ C 0.5 ☐ C 1		DRAWN BY		PLANNED BY	CHECKED BY	APPROVED BY
TOLERANCE LIMITS		JJS		2013 08 14		MODEL CB2C K100,K250
☒ MM ☐ INCH		0.0 ±0.1 0.0 ±0.05 0.00 ±0.01 0.000 ±0.002		0.0 ±0.04 0.00 ±0.02 0.000 ±0.004 0.0000 ±0.0002		ORDER. ORDER DWG. NO
		PMH precision machine itech		DWG NO CB2C-K100,K250		SHEET