


NO	DATE	ZONE	REVISION	CO'T	SIGN
△					

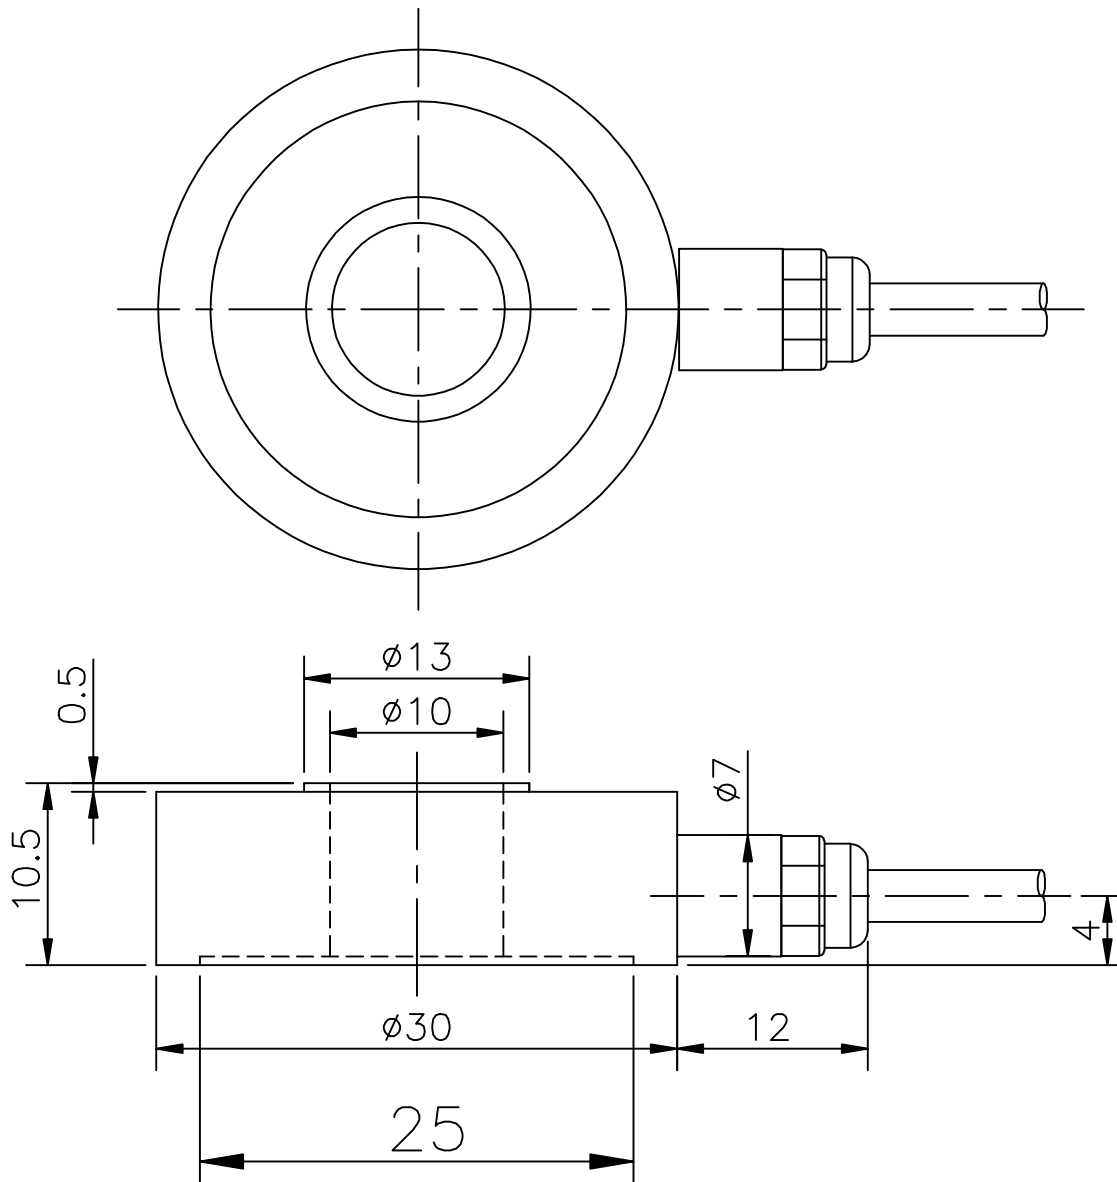

SPECIFICATIONS	
MODEL	CWW173
RATED CAPACITY (R.C.)	150kgf
RATED OUTPUT (R.O.)	2mV/V $\pm$ 1%
NON-LINEARITY	0.5% R.O.
HYSTERESIS	0.5% R.O.
REPEATABILITY	0.5% R.O.
ZERO BALANCE	$\pm$ 1% R.O.
TEMP. RANGE COMPENSATED	-10°C~70°C
SAFE TEMPERATURE RANGE	-20°C~80°C
TEMP. EFFECT ON RATED OUTPUT	$\pm$ 0.1%LOAD/10°C
TEMP. EFFECT ON ZERO BALANCE	$\pm$ 0.05%R.O./10°C
RESISTANCE, INPUT	700 Ohm $\pm$ 30
RESISTANCE, OUTPUT	700 Ohm $\pm$ 2
INSULATION RESISTANCE BRIDGE TO GROUND	2000M Ω
ELECTRICAL CONNECTION	ϕ 3mm x 4C x 3m
EXC. RECOMMENDED	10V
SAFE OVERLOAD	120% R.C.

	LOAD CELL								
NO	DESCRIPTION		MATERIAL	HEART TREAT	Q'TY	DIMENSIONS		REMARK	
CHAMFER			SCALE 1 : 1		ANGLE 1st 3rd		DESCRIPTION		
☐ C 0.1 ☐ C 0.3 ☒ C 0.5 ☐ C 1			DRAWN BY		PLANNED BY		CHECKED BY		APPROVED BY
TOLERANCE LIMITS			JJS				MODEL		ORDER.
☒ MM ☐ INCH			2014.04.14				CWW173-K150		ORDER DWG. NO
0.0 ±0.1 0.0 ±0.05 0.00 ±0.01 0.000 ±0.002			PMHitech				MAKER DWG. NO		SHEET
							CWW173-1A-K150		