

CZ1A


SMALL SCALE

PMH 다정 다의테크 itech

■ Sub-Title

소형 로드셀로 대량생산에 적용

■ DIMENSION

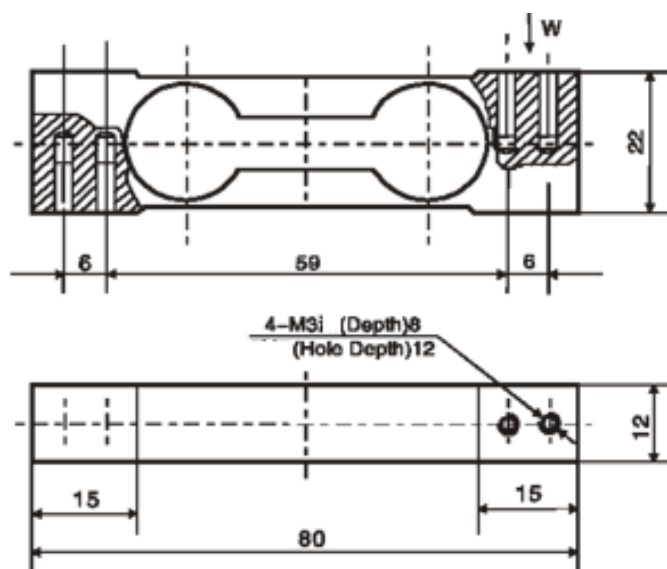

■ FEATURE

Rated Load	0.5, 1, 2, 3 kgf	Operating Temp Range	-30~70 °C
Sensitivity	1.0~1.2 mV/V	Safe load limit	120%
Total Error	±0.05% F.S	Over load limit	150%
Creep (30min)	±0.05% F.S	Recommend excitation	5~10V dc
Zero balance	±1% F.S	Max excitation	12 V dc
TCO	±0.02% F.S/10 °C	Material	Alloy steel
TC SPAN	±0.02% F.S/10 °C	Insulation resistance	5000MΩ
Input resistance	1055±10 Ω	Output resistance	1000±10 Ω