

CZ358-L6D



SINGLE POINT

PMH precision measurement itech

■ Sub-Title

알루미늄 합금 IP65
 최대 플랫폼 : 250X350 mm
 저울 등에 사용.

■ DIMENSION

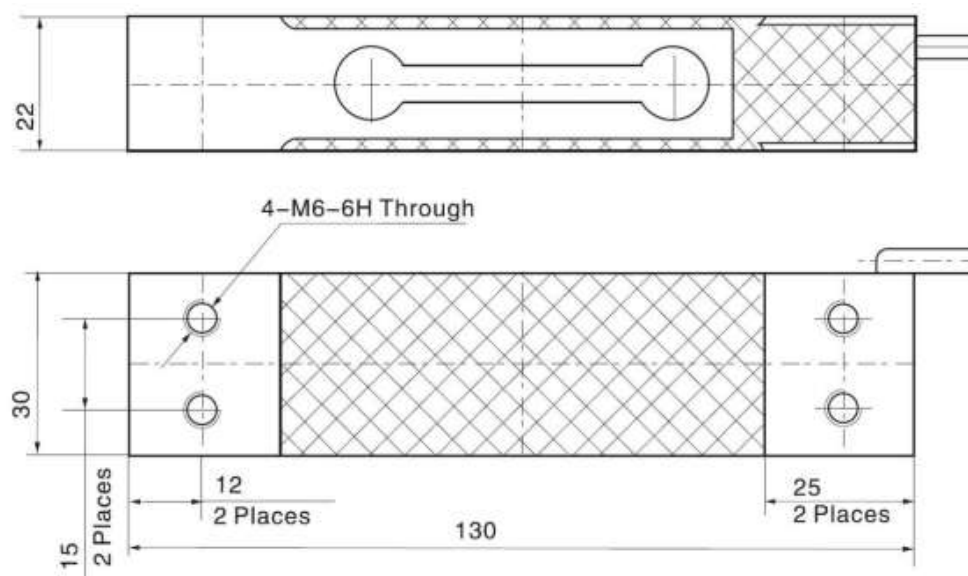

■ FEATURE

Rated Load	3, 5, 6, 8, 10, 15, 20, 30, 35, 40, 50 kgf	Operating Temp Range	-30~70℃
Sensitivity	2.0 mV/V	Safe load limit	120%
Total Error	±0.05% F.S	Over load limit	150%
Creep (30min)	±0.05% F.S	Recommend excitation	5~10V dc
Zero balance	±2% F.S	Max excitation	12 V dc
TCO	±0.02% F.S/10℃	Material	Alloy aluminium
TC SPAN	±0.02% F.S/10℃	Insulation resistance	5000MΩ
Input resistance	409±6 Ω	Output resistance	350±3 Ω