

Model PTD

General Purpose Pressure Transducer

Description

PTD model has applied Silicon Piezoresistive cell, which attached High Temperature Glass on Titanium. Since it does not use O-ring, there is no possibility of corrosion and leak. Its low price makes it suitable for industrial uses. With its various outputs, it may be interfaced with various controllers.

Features

- ▶ CE Certified
- ▶ Built-in amplifier Circuit(VDC, mA)
- ▶ Measuring range -0.1 ~ 150MPa
- ▶ 0.5%FS accuracy
- ▶ Piezoresistive silicon cell
- ▶ Stainless steel, Titanium media-wetted materials

Applications

- ▶ Process control
- ▶ Hydraulics & Pneumatic
- ▶ Compressor Control
- ▶ Chillers
- ▶ Refrigeration Equipment



Specifications

Range

0 ~ 100kPa ... 150MPa (Gauge)
-100kPa ~ 0 ~ 100kPa ... 150MPa (Gauge)

Performance

Accuracy	±0.5%FS(RSS)
Thermal Effect on Zero	±0.05%FS/°C (≤200kPa : ±0.1%FS/°C)
Thermal Effect on Span	±0.05%FS/°C (≤200kPa : ±0.1%FS/°C)
Compensated Temperature Range	-10 ~ 70°C
Operating Temperature Range	-20 ~ 80°C(Optional -20~100°C)

Electrical


Excitation	11 ~ 28VDC
Output	0~5VDC, 1~5VDC, 0~10VDC, 4~20mA(2Wire)
Electrical Connection	Connector, Head, Din Connector

Physical

Proof Pressure	X1.5 or 150MPa, Whichever is less.
Burst Pressure	X2 or 150MPa, Whichever is less.
Vibration	49.1m/s ² {5G}, 10~500Hz
Shock	490m/s ² {50G}
Pressure Port	R(PT)1/8", G(PF)1/8", R(PT)1/4"(Stock), G(PF)1/4", R(PT)3/8"(Stock), G(PF)3/8"
Media-Wetted Materials	Stainless Steel 304 + Titanium 87% or Titanium 87%
Weight	Connector type : Approx. 140g (Sensor Only)


Dimension

► Connector Type

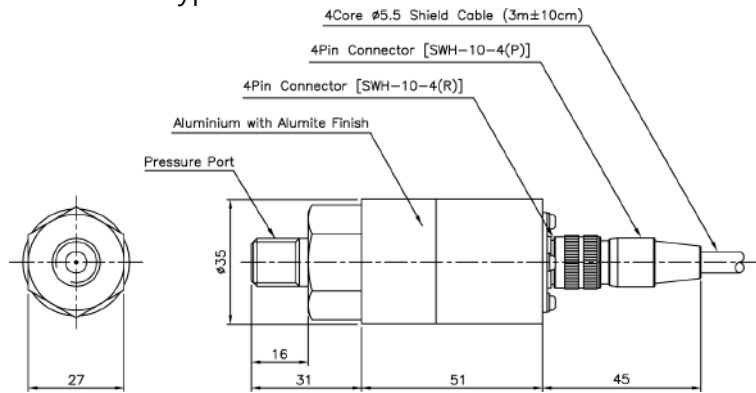


Pin No.	Wire Color	Connections		
		4Wire	3Wire	2Wire
1	Red	Input ⊕	Input ⊕	Input ⊕
2	White	Output ⊖	Common ⊖	x
3	Black	Input ⊖	x	Output ⊕
4	Green	Output ⊕	Output ⊕	x
5	Shield	Earth	Earth	Earth

► Head Type

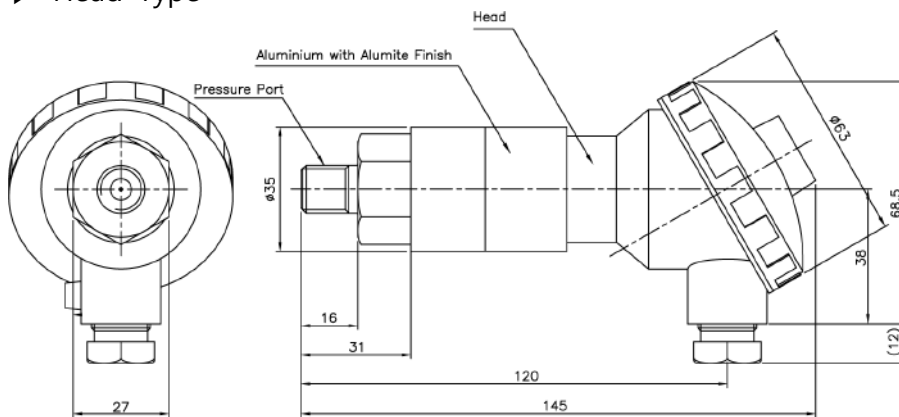

No.	Connections
	2Wire
1	Input ⊕
2	Earth
3	Output ⊕


► Din connector Type

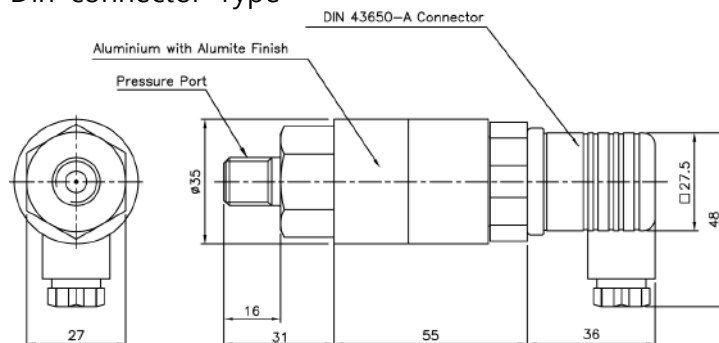


Pin No.	Connections	
	3Wire	2Wire
1	Input ⊕	Input ⊕
2	Common ⊖	Output ⊕
3	Output ⊕	x
⊕	Earth	Earth

Internal Circuit Diagram

► 2Wire mA Output Type

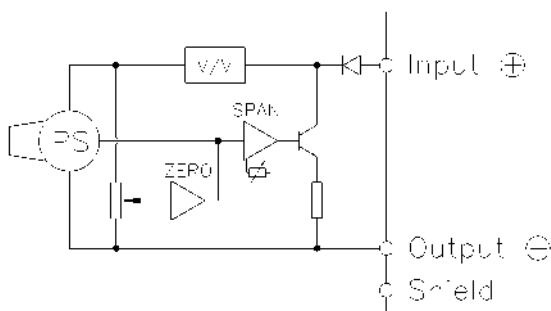

► 3, 4Wire VDC Output Type

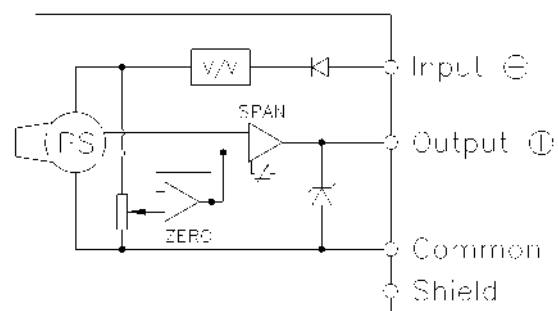

Ordering Information

Model Name		PTD	B	0100	R	A	P	A	-	TI	Media-Wetted Materials	
Output											None : SS304, Ti 87%	
B : 4Wire 0~5V											TI : Ti 87%	
C : 3Wire 0~5V											Option	
D : 4Wire 1~5V											A : Normal	
E : 3Wire 1~5V											B : Temperature Range -20~100°C	
Pressure Range											Connecting Methods	
XXXX : Pressure											P : Connector	
CXXX : Compound Pressure											W : Water Proof Connector(IP67)	
Pressure Unit											Pressure port	
R : kPa											A : R(PT)3/8"	
B : bar											D : G(PF)1/4"	
P : psi											B : G(PF)3/8"	
											E : R(PT)1/2"	
											C : R(PT)1/4"	
											Q : G(PF)1/2"	



SENSOR SYSTEM TECHNOLOGY CO., LTD.

ADD : Rm.5010, Ansan Digital Park, 81, Neungan-ro,
Danwon-gu, Ansan-si, Gyeonggi-do, Korea.

TEL : 82-31-310-8910~9

FAX : 82-31-310-8920

<http://www.sensys.co.kr>

e-mail : master@sensys.co.kr

· Specifications are subject to change without notice.